

BRONZE

ASBESTOS PACKED WATER LEVEL GAUGE

**MADE WITH
MAXIMUM PERFECTION**



DESCRIPTION :

'WJ' Bronze Asbestos Packed Water Level Gauge screwed male ends BSPT Threads or flanged ends to BS-10 Table 'F'. Suitable for 150 PSIG (10.54 Kg/Cm²g) max. pressure and 428°F (220°C) max. temperature. Tested to 300 PSIG (21.08 Kg/Cm²g) Hydraulic Pressure.

TESTING AND CERTIFICATION :

All water level gauges are tested at double the max. working pressure. Each gauge is supplied with IBR Test Certificate in Form III-C issued by The Director of Boilers, Punjab.



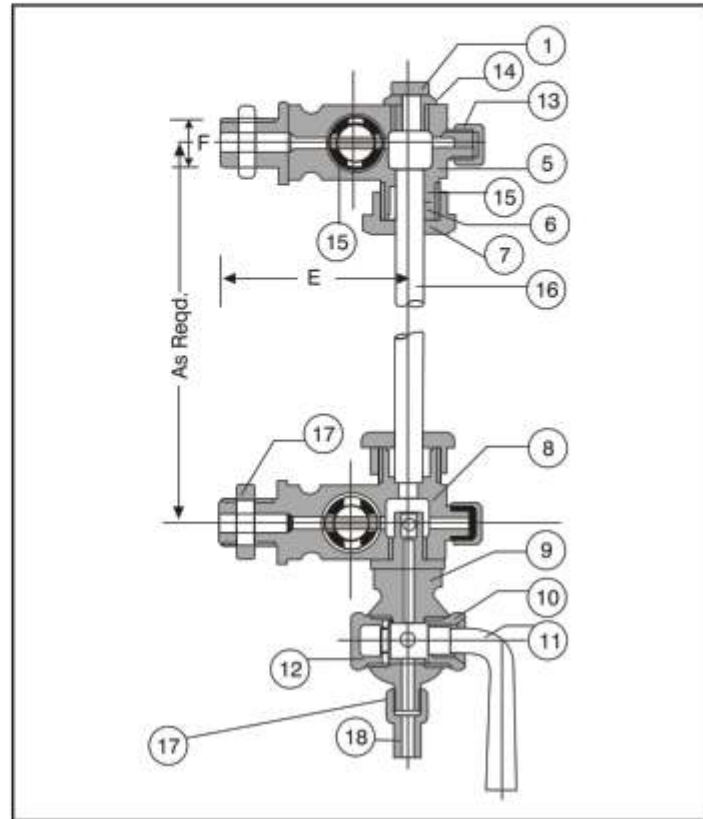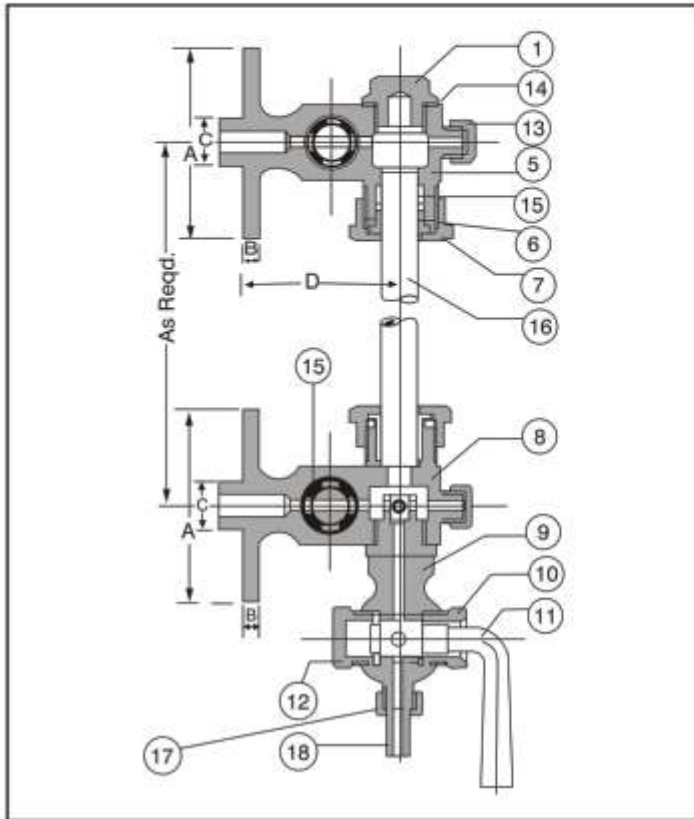

DIMENSIONS

Nominal Size	A	B	C	D	E	F
15 mm (1/2")	95.4	7.9	19.0	58	85	1/2" BSPT
16 mm (5/8")	101.6	7.9	25.4	77	110	5/8" BSPT
20 mm (3/4")	101.6	7.9	25.4	77	110	3/4" BSPT

MATERIALS

PART No.	NAME OF PART	MATERIAL	SPECIFICATION
1.	Top Nut	Bronze	IBR 282 (a) (IV) Gr. B.
2.	Cap Nut	Bronze	IBR 282 (a) (IV) Gr. B.
3.	Nut for Plug	Bronze	IBR 282 (a) (IV) Gr. B.
4.	Plug	Bronze	IBR 282 (a) (IV) Gr. B.
5.	Top Arm	Bronze	IBR 282 (a) (IV) Gr. B.
6.	Gland	Bronze	IBR 282 (a) (IV) Gr. B.
7.	Gland Nut	Bronze	IBR 282 (a) (IV) Gr. B.
8.	Bottom Arm	Bronze	IBR 282 (a) (IV) Gr. B.
9.	Drain Cock Body	Bronze	IBR 282 (a) (IV) Gr. B.
10.	Plug Nut	Bronze	IBR 282 (a) (IV) Gr. B.
11.	Drain Plug	Bronze	IBR 282 (a) (IV) Gr. B.
12.	Adjusting Nut	Bronze	IBR 282 (a) (IV) Gr. B.
13.	Drain Nut	Bronze	IBR 282 (a) (IV) Gr. B.
14.	Washer	Steam Jointing	----
15.	Packing	Graphited Asbestos	----
16.	Glass Tube	Glass	----
17.	Retaining Nut	Bronze	IBR 282 (a) (IV) Gr. B.
18.	Nozzle	Bronze	IBR 282 (a) (IV) Gr. B.