




## LEADER BRONZE Y - TYPE STRAINER

### SPECIFICATIONS

'Y Type Strainer PN-16

Screwed in Cover, Screwed Female Ends

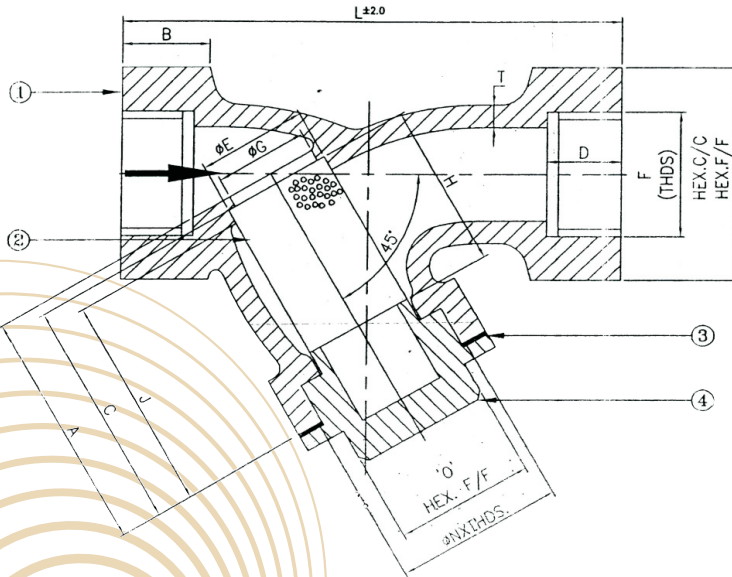

### STANDARD MATERIAL COMBINATION

P.NO.	DESCRIPTION	MATERIALS	SPECIFICATIONS
1	BODY	G.M.	BSEN 1982 GR. CC491K
2	SCREEN	S.S.	TYPE 304 1 PERFORATION
3	GASKET	C.N.A.F.	
4	COVER	G.M.	BSEN 1982 GR. CC491K

### DIMENSIONAL DATA

SIZE (mm)	15	20	25	32	40	50
L	78.5	99	115	135	160	196
F 'THDS'	1/2" BSP	3/4" BSP	1" BSP	1-1/4" BSP	1-1/2" BSP	2" BSP
HEX C/C	30.6	39.0	47.0	59.5	65.5	81.0
HEX F/F	27.5	35.0	43.0	51.5	58.5	72.5
'O' HEX F/F	19.5	23.0	28.0	33.0	45.0	54.0
ITEM CODE	GM 230	GM 230	GM 230	GM 230	GM 230	GM 230
Class	PN-16	PN-16	PN-16	PN-16	PN-16	PN-16

### TEST PRESSURES

#### BODY TEST PRESSURE

350 PSIG (HYD.)

NOTE: The above data is subject to change without notice due to our continuing product improvement program.

\*Copper Ball can be provided on request.